



Plains CO₂ Reduction (PCOR) Partnership
Energy & Environmental Research Center (EERC)

COMPARISON OF NON-EOR AND EOR LIFE CYCLE ASSESSMENTS

Plains CO₂ Reduction (PCOR) Partnership Phase III Task 9 – Deliverable D105

Prepared for:

Andrea M. Dunn

National Energy Technology Laboratory
U.S. Department of Energy
626 Cochrans Mill Road
PO Box 10940
Pittsburgh, PA 15236-0940

DOE Cooperative Agreement No. DE-FC26-05NT42592

Prepared by:

Melanie D. Jensen
Steven A. Schlasner
John A. Hamling
Kerryanne M. Leroux
Charles D. Gorecki

Energy & Environmental Research Center
University of North Dakota
15 North 23rd Street, Stop 9018
Grand Forks, ND 58202-9018

Nicholas A. Azzolina

The CETER Group, Inc.
1027 Faversham Way
Green Bay, WI 54313-7491

EERC DISCLAIMER

LEGAL NOTICE This research report was prepared by the Energy & Environmental Research Center (EERC), an agency of the University of North Dakota, as an account of work sponsored by the U.S. Department of Energy (DOE) National Energy Technology Laboratory (NETL). Because of the research nature of the work performed, neither the EERC nor any of its employees makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement or recommendation by the EERC.

ACKNOWLEDGMENT

This material is based upon work supported by DOE NETL under Award No. DE-FC26-05NT42592.

DOE DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government, nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.



Plains CO₂ Reduction (PCOR) Partnership
Energy & Environmental Research Center (EERC)

COMPARISON OF NON-EOR AND EOR LIFE CYCLE ASSESSMENTS

ABSTRACT

The Energy & Environmental Research Center worked with The CETER Group, Inc., through the Plains CO₂ Reduction Partnership to evaluate whether life cycle greenhouse gas (GHG) emissions associated with incremental oil produced by enhanced oil recovery (EOR) using anthropogenic carbon dioxide (CO₂) are less than GHG emissions associated with conventional oil production. A cradle-to-grave approach was used to quantify the full life cycle GHG emissions for four scenarios: conventional natural gas production and conventional oil production (i.e., the current conventional approach), natural gas processing with CO₂ capture coupled with typical West Texas EOR, natural gas processing at Shute Creek plant and conventional oil production, and natural gas processing at Shute Creek plant with CO₂ capture coupled with EOR at the Bell Creek oil field.

Two tools were used to conduct the life cycle analysis (LCA), including 1) a customized programming of the Argonne National Laboratory Greenhouse Gases, Regulated Emissions, and Energy Use in Transportation model, known as the GREET model, and 2) Microsoft Excel[®] spreadsheet models using emission factors from peer-reviewed literature and U.S. Department of Energy National Energy Technology Laboratory publications. The modeling results show that the scenarios with CO₂ capture and CO₂ EOR produce both natural gas and oil with lower life cycle emissions than conventional systems producing natural gas and oil independently. These results are supported using both different modeling approaches and sets of modeling inputs.

While considerable effort was put into acquiring necessary detail for accurate models, much of the data used were obtained from secondary sources. Significantly greater detail and more rigorous treatment would be required to produce an LCA for use as proof of CO₂ emission reduction.

TABLE OF CONTENTS

LIST OF FIGURES	ii
LIST OF TABLES	ii
ACRONYMS AND ABBREVIATIONS	iii
EXECUTIVE SUMMARY	iv
INTRODUCTION	1
LCA METHODS AND ASSUMPTIONS	1
System Boundaries	1
Functional Unit of Comparison	3
Global Warming Potential Coefficients for Methane and Nitrous Oxide	3
LCA Modeling Scenarios	3
DEVELOPMENT OF A LIFE CYCLE SPREADSHEET MODEL	3
Emission Factors for Natural Gas Extraction and Processing	4
Raw Natural Gas Extraction (all four scenarios)	4
Natural Gas Processing (Scenarios NA1 and NA2)	4
Natural Gas Processing (Scenarios BC1 and BC2)	6
Pipeline Transport of CO ₂	8
Emission Factors for the Gate-to-Gate Segment (crude oil extraction)	8
Conventional Oil Extraction	8
Incremental Oil Extraction via CO ₂ EOR	8
Emission Factors for the Downstream Segment	9
Integrating the Spreadsheet Model Segments	10
Normalizing All Four Scenarios to Bell Creek	10
Calculating Upstream Emissions from Natural Gas	10
GREET MODELING	11
GREET Inputs	11
GREET Modeling Challenges for Scenario NA2 and Scenario BC2	12
Final GREET Models	12
LCA RESULTS	13
Spreadsheet Model Results	13
GREET Model Results	14
SENSITIVITY ANALYSIS	15
CONCLUSIONS	17
REFERENCES	18
DETAILED LIFE CYCLE INVENTORY RESULTS	Appendix A

LIST OF FIGURES

1 Boundaries for System 1 and System 2 used in the LCA 2

2 Stacked bar chart showing the life cycle emissions (Mt CO₂eq) associated with each model segment for the four different scenarios that were modeled using spreadsheet models or GREET 16

LIST OF TABLES

1 Scenario NA1 Natural Gas-Processing Plant Emissions with CO₂ Capture 5

2 Scenario NA2 Natural Gas-Processing Plant Emission Ratios with CO₂ Capture 5

3 Raw Inlet Gas Chemical Composition for the Shute Creek Facility 6

4 Shute Creek (Scenario BC1) Natural Gas-Processing Plant Emission Ratios Without CO₂ Capture 6

5 Shute Creek (Scenario BC2) Natural Gas-Processing Plant Emission Ratios with CO₂ Capture 7

6 Notional Refined Product Distribution from Bell Creek Crude Oil 12

7 Summary of Segments Modeled in GREET or Spreadsheet 13

8 Spreadsheet Modeling Results by Model Segment for Each of the Four Scenarios 14

9 GREET Model Emission Summary by Model Segment for Each of the Four Scenarios 15

10 Sensitivity Analysis Summary for Scenario BC2 17

ACRONYMS AND ABBREVIATIONS

AGR	acid gas removal
bbbl	barrel
CH ₄	methane
CO ₂	carbon dioxide
CO ₂ eq	CO ₂ equivalent; used to put all greenhouse gases on the same basis (i.e., 1 = CO ₂)
DOE	U.S. Department of Energy
EERC	Energy & Environmental Research Center
EOR	enhanced oil recovery
EPA	U.S. Environmental Protection Agency
GHG	greenhouse gas
GREET	Greenhouse Gases, Regulated Emissions, and Energy Use in Transportation (model)
GWP	global warming potential
He	helium
hp	horsepower
H ₂ S	hydrogen sulfide
kg	kilogram
kW	kilowatt
lb	pound
LCA	life cycle analysis
LPG	liquefied petroleum gas
MMbbl	million barrel
MMBtu	million British thermal unit
MMscf	million standard cubic feet (at Oil and Gas standard of 60°F and 12 atm)
Mscf	thousand standard cubic feet
Mt	million tonne
MWh	megawatt hour
N ₂	nitrogen
NGL	natural gas liquid
NETL	National Energy Technology Laboratory
N ₂ O	nitrous oxide
NO _x	nitrogen oxides
OOIP	original oil in place
PCOR	Plains CO ₂ Reduction (Partnership)
RF	recovery factor
tonne	metric ton
UF _{net}	net CO ₂ utilization factor



COMPARISON OF NON-EOR AND EOR LIFE CYCLE ASSESSMENTS

EXECUTIVE SUMMARY

The Energy & Environmental Research Center (EERC) is working with The CETER Group, Inc. (CETER), through the Plains CO₂ Reduction (PCOR) Partnership to evaluate whether life cycle greenhouse gas (GHG) emissions associated with incremental oil produced by enhanced oil recovery (EOR) using anthropogenic carbon dioxide (CO₂) are less than GHG emissions associated with conventional oil production because of the significant amount of CO₂ that is permanently stored in the oil reservoir during CO₂ EOR (approximately ½ ton [450 kg] of CO₂ per barrel of incremental oil produced [Azzolina and others, 2015]).

This report assesses a cradle-to-grave system boundary to quantify the full life cycle GHG emissions associated with the extraction of crude oil, pipeline transport of crude oil to a refinery, refining of crude oil into fuels, transportation of fuels to the point of sale, and finally combustion of the fuels. In this report, four different scenarios were modeled and compared:

- Scenario NA1: North American natural gas processing and U.S. primary and secondary petroleum recovery and processing.
- Scenario NA2: North American natural gas processing with CO₂ capture and U.S. EOR and processing using the captured CO₂.
- Scenario BC1: LaBarge (Shute Creek) natural gas processing and Bell Creek-like conventional oil production (because Bell Creek does not currently produce oil conventionally).
- Scenario BC2: LaBarge (Shute Creek) natural gas processing with CO₂ capture and Bell Creek incremental oil production via EOR using the captured CO₂.

Two different tools were used to conduct the life cycle analysis (LCA): 1) customized programming of the Argonne National Laboratory Greenhouse Gases, Regulated Emissions, and Energy Use in Transportation model, known as the GREET model, and 2) Microsoft Excel[®] spreadsheet models using emission factors from the peer-reviewed literature and U.S. Department of Energy (DOE) National Energy Technology Laboratory (NETL) publications.

A set of spreadsheet models was constructed for all four scenarios using Microsoft Excel[®] spreadsheets and emission factors from the peer-reviewed literature and NETL publications. Spreadsheet models are easy to use, are accessible to a broad array of practitioners, and allow the integration of emission factors from multiple literature sources. Each spreadsheet model contained

three segments: natural gas extraction, processing, and transport; crude oil extraction, also called gate-to-gate processing; and downstream processing of the oil. The spreadsheet model segments were integrated into each of the four scenarios. To permit fair comparisons across scenarios, the natural gas and oil production for all four scenarios was normalized to the forecasted Bell Creek performance over 25 years.

The GREET model was also used to construct segments similar to those of the spreadsheet model. The GREET model is quite complex. For example, the GREET conventional crude oil recovery and processing model contains seven pathways, 13 technologies, and 23 processes that describe emissions related to U.S. crude oil recovery, processing, transport, and refining into six major U.S. petroleum refinery products. Unfortunately, a default EOR crude oil recovery and processing pathway does not exist within the GREET model. Therefore, the Scenario NA2 and Scenario BC2 simulations were constructed outside of GREET. Ultimately, default GREET modules, GREET modules modified with site-specific inputs, and spreadsheet models had to be combined to derive a final life cycle emission for a particular scenario.

The results of the LCA spreadsheet model indicated that the scenarios with CO₂ capture and CO₂ EOR produce both natural gas and oil with lower emissions. For example, the life cycle emission for Scenario NA1 is 10.62 Mt CO₂eq and for Scenario NA2 is 9.54 Mt CO₂eq, or approximately 10% lower. Similarly, the life cycle emission for Scenario BC1 is 11.78 Mt CO₂eq and for Scenario BC2 is 8.67 Mt CO₂eq, or approximately 26% lower. Preliminary sensitivity analysis of the spreadsheet model shows that the model results are sensitive to the net CO₂ utilization, which directly impacts the purchased CO₂ requirement and, therefore, dictates the upstream emissions associated with raw natural gas extraction and processing.

Analogous to the spreadsheet modeling results, the GREET scenarios with CO₂ capture and CO₂ EOR also produce gas and oil with less emission of CO₂. For example, the life cycle emissions for Scenario BC1 are 13.86 Mt CO₂eq and for Scenario BC2 are 10.22 Mt CO₂eq, or approximately 26% lower. The life cycle emissions for Scenarios BC1 and BC2 modeled using GREET differ from the spreadsheet model results by approximately 15% (11.78 vs. 13.86 Mt CO₂eq for NA2 and 8.67 vs. 10.22 Mt CO₂eq for BC2).

The results highlight the uncertainty in the estimates. However, when comparing scenarios within one modeling approach (i.e., all-spreadsheet or all-GREET), the internally consistent approaches yield the same result: there is a net reduction in life cycle CO₂ emissions when processing natural gas and producing incremental oil via EOR using captured CO₂.

While considerable effort was put into acquiring necessary detail for accurate models, much of the data used were obtained from secondary sources. Significantly greater detail and more rigorous treatment would be required to produce an LCA for use as proof of CO₂ emission reduction.



Plains CO₂ Reduction (PCOR) Partnership
Energy & Environmental Research Center (EERC)

COMPARISON OF NON-EOR AND EOR LIFE CYCLE ASSESSMENTS

INTRODUCTION

The Energy & Environmental Research Center (EERC) worked with The CETER Group, Inc. (CETER), through the Plains CO₂ Reduction (PCOR) Partnership to evaluate whether life cycle greenhouse gas (GHG) emissions associated with incremental oil produced by enhanced oil recovery (EOR) using anthropogenic carbon dioxide (CO₂) are less than GHG emissions associated with conventional oil production. Life cycle GHG emissions may be lower for incremental oil produced via CO₂ EOR versus conventional oil production because of the significant amount of CO₂ that is permanently stored in the oil reservoir during CO₂ EOR, amounting to approximately ½ ton (450 kg) of CO₂ per barrel of incremental oil produced (Azzolina and others, 2015).

This report assesses a cradle-to-grave system boundary for quantifying the full life cycle GHG emissions associated with the extraction, processing, and combustion of oil under different production scenarios. Two different tools were used to conduct the life cycle analysis (LCA): 1) Microsoft Excel[®] spreadsheet models using emission factors from the peer-reviewed literature and U.S. Department of Energy (DOE) National Energy Technology (NETL) publications and 2) customized programming of the Argonne National Laboratory Greenhouse Gases, Regulated Emissions, and Energy Use in Transportation Model, known as the GREET model.

The following sections describe the LCA modeling boundaries and assumptions as well as the GREET and spreadsheet modeling inputs and results.

LCA METHODS AND ASSUMPTIONS

LCA is a systematic approach that calculates the environmental burdens of a product or system (International Organization for Standardization, 2006a,b). In this report, the sole focus was on accounting for GHG emissions in the system, with the primary product being oil. To compare life cycle GHG emissions for incremental oil produced via CO₂ EOR against a baseline conventional oil, two systems were defined, System 1 and System 2, and are described below.

System Boundaries

Figure 1 illustrates the system boundaries for System 1 and System 2.

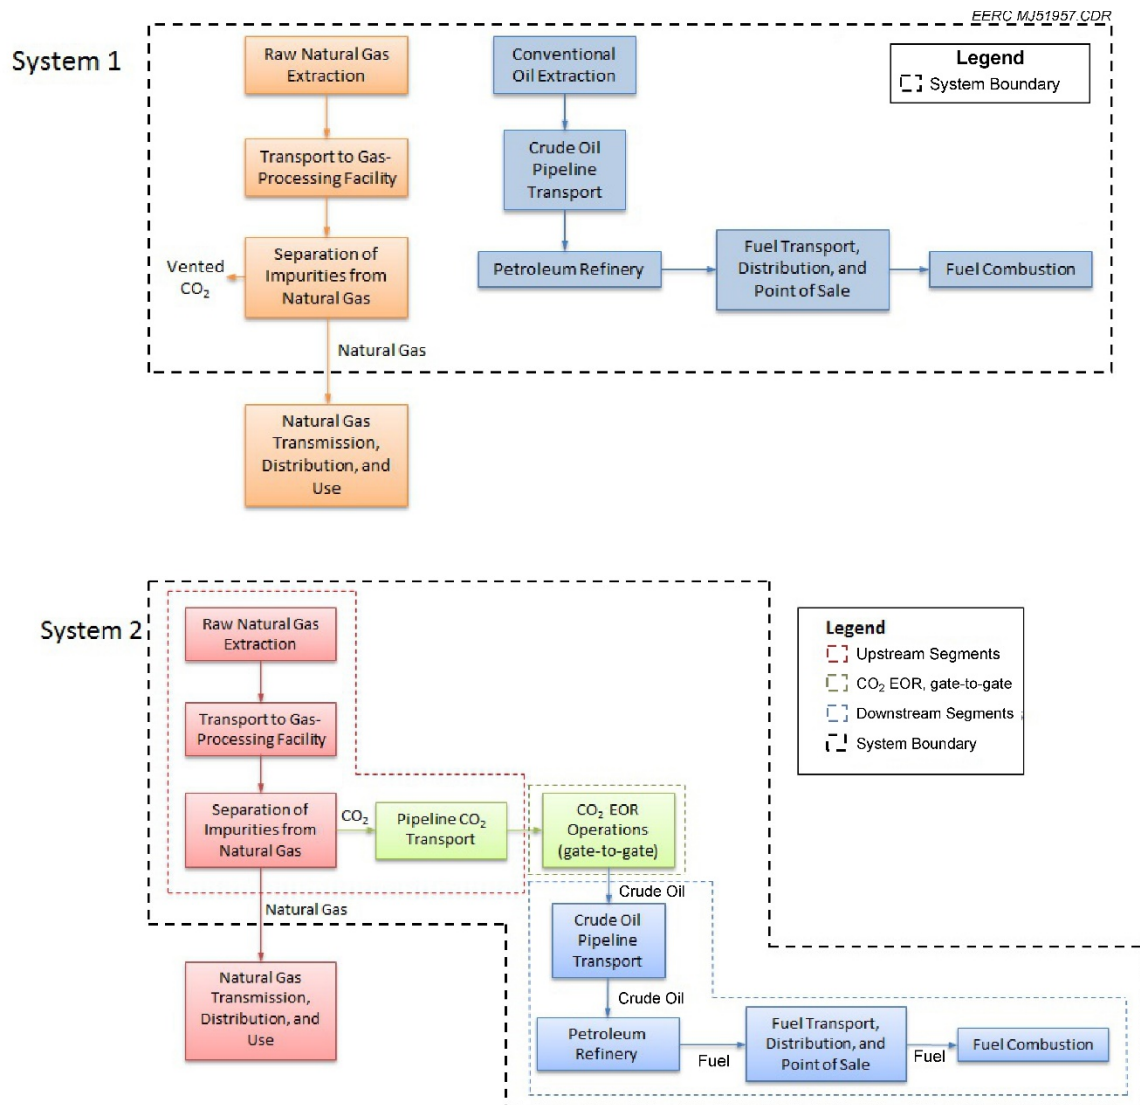


Figure 1. Boundaries for System 1 (top) and System 2 (bottom) used in the LCA.

System 1 represents two separate production processes, one for natural gas extraction, transport, and processing and another for crude oil extraction, refining, and combustion. Two important characteristics of System 1 are that during the natural gas processing, CO₂ is vented to the atmosphere and crude oil production assumes primary or secondary (waterflood) extraction without CO₂ EOR. System 1 represents the conventional baseline, or status quo, for producing natural gas and oil.

System 2 represents a coupled natural gas and oil system, where CO₂ is captured from the natural gas-processing plant and transported to the oil field and the crude oil is produced via CO₂ EOR (tertiary recovery). An important distinction about System 2 is that instead of venting all of the CO₂ to the atmosphere at the gas-processing plant, some of the CO₂ is instead captured and sent to the oil field where it is permanently stored in the oil reservoir as part of the EOR process.

The remaining CO₂ is vented to the atmosphere; however, the amount of CO₂ that is captured is approximately twice the amount that is vented. The vented CO₂ is accounted for in System 2. System 2 represents the alternative system that was evaluated against the conventional baseline.

Functional Unit of Comparison

This work focuses on the life cycle GHG emissions associated with crude oil. All results were expressed in million metric tons (tonnes) of CO₂ equivalent (Mt CO₂eq).

Global Warming Potential Coefficients for Methane and Nitrous Oxide

While CO₂ is the most commonly produced GHG, methane (CH₄) and nitrous oxide (N₂O) also act as GHGs. In this report, GHG emissions are expressed in units of CO₂eq using the 100-year global warming potential (GWP) coefficients of 34 for CH₄ and 298 for N₂O (Forster and others, 2007; Intergovernmental Panel on Climate Change, 2013). The GWP coefficient for CO₂ is one. Expressing GHGs in units of CO₂eq allows a summation of all three values (CO₂, CH₄, and N₂O) into a single number, i.e., kg CO₂eq.

LCA Modeling Scenarios

GHG emissions from four different scenarios were modeled and are compared in this report:

Scenario NA1: North American natural gas processing and U.S. primary and secondary petroleum recovery and processing (North America System 1).

Scenario NA2: North American natural gas processing with CO₂ capture and U.S. EOR and processing using the captured CO₂ (North America System 2).

Scenario BC1: LaBarge (Shute Creek) (hereafter “Shute Creek”) natural gas processing and conventional oil production at a Bell Creek-like field because the Bell Creek Field does not currently employ conventional oil production methods (Bell Creek System 1).

Scenario BC2: Shute Creek natural gas processing with CO₂ capture and Bell Creek incremental oil production via EOR using the captured CO₂ (Bell Creek System 2).

The specific inputs for each scenario are dependent upon whether they were modeled using the spreadsheet models or GREET, as described in their respective sections.

DEVELOPMENT OF A LIFE CYCLE SPREADSHEET MODEL

A set of models was constructed for all four scenarios using Microsoft Excel spreadsheets and emission factors from the peer-reviewed literature and NETL publications. The primary reasons for pursuing spreadsheet models is that they are easy to use and are accessible to a broad

array of practitioners (i.e., nearly everyone has Microsoft Office® on their computers). In addition, the spreadsheet models allow the integration of emission factors from multiple literature sources.

Emission Factors for Natural Gas Extraction and Processing

There are two segments associated with the upstream natural gas portions of the models: 1) raw natural gas extraction and 2) natural gas processing.

Raw Natural Gas Extraction (all four scenarios)

Emission factors from NETL (2010a) for raw natural gas extraction were used across all four scenarios. This unit process provides a summary of relevant input and output flows associated with the extraction of natural gas from a conventional onshore gas well. The boundaries begin with raw natural gas extracted from nature and end with natural gas ready for pipeline transport. The operation of compressors and dehydrators is included in this unit process; hydrogen sulfide removal (sweetening) is not included in this unit process.

The NETL (2010a) emission factors include 0.112 kg CO₂, 1.53E-03 kg CH₄, and 1.66E-07 kg N₂O per kg of natural gas extracted. The net emission factor for raw natural gas extraction is the sum total of these emission sources, which is 3.13 kg CO₂eq/Mscf (thousand standard cubic feet) of raw natural gas extracted ($[(0.112 + (0.0015 \times 34) + (1.66E-07 \times 298))] \times 19.05$). In converting from Mscf natural gas to kg, we assume 0.042 lb/scf (American Petroleum Institute, 2009), which is 19.05 kg/Mscf. These emission factors for natural gas extraction compare well to the ones presented by NETL (2014).

Natural Gas Processing (Scenarios NA1 and NA2)

Emission factors from NETL (2010b) were used for natural gas processing for Scenarios NA1 and NA2. This unit process provides a summary of relevant input and output flows associated with the acid gas removal (AGR) of natural gas, specifically the removal of hydrogen sulfide (H₂S). The boundaries begin with the receipt of “sour” natural gas and end with “sweetened” natural gas ready for pipeline transmission.

The NETL (2010b) emission factors include emissions associated with both venting and fuel usage. Venting includes 0.0868 kg CO₂ and 9.72E-04 kg CH₄ per kg of natural gas sweetened. Additional emissions associated with fuel usage include 6.47E-05 kg CO₂, 1.27E-06 kg CH₄, and 3.53E-07 kg N₂O per kg of natural gas processed. The net emission factor for raw natural gas extraction is the total of these emission sources, which is 2.28 kg CO₂eq/Mscf of natural gas processed calculated as follows: $[(0.0868 + 6.47E-05) + \{(9.72E-04 + 1.27E-06) \times 34\} + (3.53E-07 \times 298)] \times 19.05$. These emission factors for natural gas extraction compare well to the ones presented by NETL (2014).

In Scenario NA2 where CO₂ is captured from the natural gas-processing plant, a simplifying assumption is made that 90% of the CO₂ that is vented during the sweetening process (AGR) is, instead, captured and transported to the EOR field. The net emission factor for natural gas

processing in Scenario NA2 is, therefore, significantly lower: 0.8 kg CO₂eq/Mscf of raw natural gas processed.

In determining emissions associated with natural gas processing, NETL (2010b) refers to the U.S. nonhydrocarbon gases removed from natural gas, which were 721,507 MMscf (million standard cubic feet) in 2009 (U.S. Energy Information Administration, 2009a), and assumes that the percent volume of CO₂ in nonhydrocarbon gas was 90% (649,356 MMscf). U.S. natural gas gross withdrawals in 2009 were 26,056,893 MMscf (U.S. Energy Information Administration, 2009b), which translates to an average CO₂ content of the raw natural gas of Approximately 2.5% (649,356 / 26,056,893). In addition, NETL (2010b) assumes a H₂S content of the natural gas of 1.0 mole per kg of natural gas.

To simplify the subsequent life cycle calculations for Scenarios NA1 and NA2, the gas flows into and out of the generic natural gas-processing plant were normalized to the raw natural gas processed, to the natural gas product to sales, or the amount of CO₂ captured and transported (Scenario NA2 only). For example, as shown in Table 1 (Scenario NA1), 1.0 MMscf of raw natural gas processed yields approximately 1.0 MMscf of natural gas product to sales and emits 0.09 MMscf of CO₂ and <0.01 MMscf of CH₄ and N₂O. In Table 2 (Scenario NA2), 1.0 MMscf of CO₂ captured and transported requires 12.81 MMscf of inlet raw natural gas, which emits 0.11 MMscf of CO₂.

Table 1. Scenario NA1 Natural Gas-Processing Plant Emissions with CO₂ Capture, MMscf/MMscf

Shute Creek Facility Emissions	Normalized to CO₂ Captured and Transported	Normalized to Raw Natural Gas Processed	Normalized to Natural Gas Product to Sales
Raw Natural Gas Processed	NA ¹	1.00	1.00
CO ₂ Captured and Transported	NA	NA	NA
CO ₂ Emitted	NA	0.09	0.09
CH ₄ Emitted	NA	0.00 ²	0.00
NO _x (nitrogen oxides) Emitted	NA	0.00	0.00
Natural Gas Product to Sales	NA	1.00	1.00

¹Not applicable.

²Values <0.01 are displayed as 0.00.

Table 2. Scenario NA2 Natural Gas Processing Plant Emission Ratios with CO₂ Capture, MMscf/MMscf

Shute Creek Facility Emissions	Normalized to CO₂ Captured and Transported	Normalized to Raw Natural Gas Processed	Normalized to Natural Gas Product to Sales
Raw Natural Gas Processed	12.81	1.00	1.00
CO ₂ Captured and Transported	1.00	0.08	0.08
CO ₂ Emitted	0.11	0.01	0.01
CH ₄ Emitted	0.01	0.00 ¹	0.00
NO _x Emitted	0.00	0.00	0.00
Natural Gas Product to Sales	12.82	1.00	1.00

¹Values <0.01 are displayed as 0.00.

Natural Gas Processing (Scenarios BC1 and BC2)

As of January 2016, the Bell Creek oil field sources 100% of its CO₂ from ExxonMobil's Shute Creek Gas Plant (Wyoming Oil and Gas Conservation Commission, 2016). Therefore, emission factors derived for the Shute Creek natural gas-processing plant in Green River, Wyoming, were used for Scenarios BC1 and BC2 (Bell Creek Systems 1 and 2). The Shute Creek natural gas-processing model for the spreadsheet models is identical to the one used in the modified GREET simulations.

Shute Creek receives natural gas from the LaBarge Field located in Sublette County. Shute Creek handles the lowest-hydrocarbon-content natural gas commercially produced in the world. The gas composition entering Shute Creek is 65% CO₂, 22% CH₄, 7.4% nitrogen (N₂), 5% H₂S, and 0.6% helium (He) (Wyoming Tax Appeals, 2006). One noticeable difference between the inlet gas composition at Shute Creek versus the inlet gas composition used by NETL (2010b) is the significantly greater amount of CO₂ (65% versus 2.5% CO₂, respectively) (Table 3). The high CO₂ content of the Shute Creek inlet gas plays an important role in the Scenarios BC1 and BC2 models, as described below in Tables 4 and 5.

Table 3. Raw Inlet Gas Chemical Composition for the Shute Creek Facility, mass percent (Source: Wyoming Tax Appeals, 2006)

Component	Raw (production)
CO ₂	65.0
CH ₄	22.0
N ₂	7.4
He	0.6
H ₂ S	5.0
Total	100.0

Table 4. Shute Creek (Scenario BC1) Natural Gas-Processing Plant Emission Ratios Without CO₂ Capture, MMscf/MMscf

Shute Creek Facility Emissions	Normalized to CO₂ Captured and Transported	Normalized to Raw Natural Gas Processed	Normalized to Natural Gas Product to Sales
Raw Natural Gas Processed	NA	1.00	6.10
CO ₂ Captured and Transported	NA	NA	NA
CO ₂ Emitted	NA	0.69	4.22
CH ₄ Emitted	NA	0.00 ¹	0.00
NO _x Emitted	NA	0.00	0.00
Natural Gas Product to Sales	NA	0.16	1.00

¹Values <0.01 are displayed as 0.00.

Table 5. Shute Creek (Scenario BC2) Natural Gas-Processing Plant Emission Ratios with CO₂ Capture, MMscf/MMscf

Shute Creek Facility Emissions	Normalized to CO₂ Captured and Transported	Normalized to Raw Natural Gas Processed	Normalized to Natural Gas Product to Sales
Raw Natural Gas Processed	2.12	1.00	6.10
CO ₂ Captured and Transported	1.00	0.47	2.88
CO ₂ Emitted	0.46	0.22	1.33
CH ₄ Emitted	0.00	0.00	0.00
NO _x Emitted	0.00	0.00	0.00
Natural Gas Product to Sales	0.35	0.16	1.00

Note: Values <0.01 MMscf are displayed as “0.00.”

The 17 production wells of the LaBarge Field are sited in the high country of the Rocky Mountains. The gas from each well flows to one of three manifolds. Gas collected at the manifolds then flows to the glycol-based primary treatment facility at Black Canyon for initial treatment (dehydration). After the initial treatment, the gas is exported 46 miles to Shute Creek via a 28-inch trunk line for final treatment (Parker and others, 2011). Emissions associated with pipeline transport from Black Canyon to Shute Creek (pipeline fugitives and electricity usage) are not captured in the current modeling approach.

The Shute Creek natural gas-processing model is based on flows of raw inlet natural gas, captured CO₂, venting, flare, and other volumes as recently reported by the State of Wyoming Oil and Gas Conservation Commission (Form 9). The raw inlet natural gas rate to the Shute Creek facility is 720 MMscfd (million standard cubic feet of raw natural gas per day), from which 340 MMscfd CO₂ is captured and transported and 92 MMscfd CO₂ is vented, producing 118 MMscfd of natural gas product to sales (ready for pipeline transport). In addition to the venting of CO₂, there are 65.4 MMscfd of CO₂eq emissions associated with plant equipment use (electric cogeneration fuel, boiler fuel, furnace fuel, flare stack, and reciprocating compressor). In total, there are 186.1 MMscfd of CO₂ emissions from the Shute Creek facility.

Analogous to the examples for Scenarios NA1 and NA2, to simplify the subsequent life cycle calculations for Scenarios BC1 and BC2, the gas flows into and out of the Shute Creek natural gas-processing plant were normalized to the amount of CO₂ captured and transported, to the raw natural gas processed, or to the natural gas product to sales (Table 4 [BC1] and Table 5 [BC2]). For example, as shown in Table 5, 1.0 MMscf of CO₂ captured and transported requires 2.12 MMscf of inlet raw gas, which produces 0.46 MMscf of CO₂ emissions and 0.35 MMscf of natural gas product to sales.

In Scenario BC1, the Shute Creek facility is assumed to operate as if CO₂ is not captured and all of the CO₂ is, therefore, vented to the atmosphere. In aggregate, these changes result in 497 MMscfd of CO₂ emissions from the Shute Creek facility without capture, or 340 MMscfd greater than Scenario BC2 with capture. There would be a small reduction in the amount of CO₂ emissions associated with plant equipment use related to the CO₂ capture unit; however, these are not captured in the current modeling approach.

The values in Tables 4 and 5 underscore the importance of the raw natural gas composition on the overall gas flows for the gas-processing plant. For example, in the generic example from NETL (2010b) for Scenario NA2, 1.0 MMscf of CO₂ captured required 12.81 MMscf of raw natural gas and emits 0.11 MMscf of CO₂. In contrast, 1.0 MMscfd of CO₂ captured at Shute Creek only requires 2.12 MMscf of raw natural gas (about six times less than NA2) and generates 0.46 MMscf CO₂ emissions (about 1.3 times more than NA2).

Pipeline Transport of CO₂

In the emission factors for natural gas processing in System 2 models (Scenarios NA2 and BC2), emissions associated with 500 miles of CO₂ pipeline transport from the Shute Creek facility to the Bell Creek oil field were also included. Using these inputs, the MMscf CO₂ emitted from electric generation for transport per MMscf CO₂ captured and transported is approximately 0.084267 MMscf/MMscf, which results in 28.65 MMscfd of CO₂ emissions associated with the pipeline transport of CO₂ from the Shute Creek facility to the Bell Creek oil field (0.084267 × 340 MMscfd CO₂ captured and transported).

Emission Factors for the Gate-to-Gate Segment (crude oil Extraction)

Conventional Oil Extraction

Systems NA1 and BC1 extract oil using conventional methods. For these systems, a gate-to-gate emission factor of 56 ± 15 kg CO₂eq/bbl was used for conventional oil extraction. This factor was derived by Mangmeechai (2009) and includes extraction of raw feedstock from the earth and any partial processing of the raw materials that may occur. It is unclear if this estimated emission factor includes drilling or other primary recovery/waterflood-related emissions. However, similar estimates of 40 to 60 kg CO₂eq/bbl have been published in the literature (McCann and Magee, 1999; Intergovernmental Panel on Climate Change, 2000).

Incremental Oil Extraction via CO₂ EOR

Systems NA2 and BC2 extract oil via CO₂ EOR, whereby CO₂ is injected into an oil reservoir, where it mixes with the oil to swell it and reduce the oil viscosity, making it lighter and detaching it from the rock surfaces. These subsurface alterations cause the oil to flow more freely within the reservoir to producing wells. During this process, approximately half of the injected CO₂ is produced together with oil, separated, and reinjected, but nearly all (over 95%) of the purchased CO₂ delivered to the oil field remains securely trapped within the deep geologic formation (U.S. Department of Energy National Energy Technology Laboratory, 2010a; Melzer, 2012; Azzolina and others, 2015). For estimating the gate-to-gate emissions associated with CO₂ EOR in Scenario NA2, the model and approach by Azzolina and others (2016) was used. This approach presents the results of a detailed LCA of GHG emissions associated with CO₂ EOR where the CO₂ is obtained from a coal-fired power plant. Azzolina and others (2016) represents a generic gate-to-gate model for CO₂ EOR that reflects average reservoir conditions and performance for the Permian Basin in Texas. The work builds upon previous investigations by NETL (2010c, 2013a) and Cooney and others (2015) and integrates new information to provide

more plausible ranges for CO₂ storage in the reservoir during CO₂ EOR from Azzolina and others (2015).

The gate-to-gate emissions were modeled for System BC2 by taking the total electrical and natural gas usage of the site rather than attempting to reconstruct the energy usage from individual pumps, compressors, etc., as was done in Azzolina and others (2016). These energy usage data were provided to the EERC by Denbury Onshore, LLC (Denbury). The Bell Creek EOR field uses 200 to 288 MWh of electricity per day and 210 to 350 Mscf of natural gas per day for both the CO₂ recycle facility and well test sites. The electrical usage is largely associated with approximately 16,000 hp (12,000 kW) of compression, which is currently running at approximately 70% capacity but will eventually run at 100% capacity later in the CO₂ flood. The electricity usage is scaled up assuming a linear progression from 70% capacity to 100% capacity over 10 years and then assuming that the facility operates at 100% capacity for the remaining 15 years.

The emission factor for delivered electricity in Montana is 620 kgCO₂eq/MWh, which includes emissions associated with both power generation (586 kgCO₂eq/MWh) and gross grid loss from the transmission and distribution of electricity (5.7% for the western region). Thus $586 \times 1.057 = 620$ kgCO₂eq/MWh (U.S. Environmental Protection Agency, 2012). Life cycle emissions associated with electricity use at the Bell Creek EOR field are, therefore, $200 \text{ MWh} \times 620 \text{ kgCO}_2\text{eq/MWh} \times 365 \text{ days/year} = 45.3$ million kgCO₂eq per year. At full capacity (288 MWh/day) 10 years into the CO₂ flood, the emissions are 65.2 million kgCO₂eq per year.

The natural gas used at the site is taken from the natural gas supply line for the main facility. A generic emission factor from NETL (2014) of 9.1 kgCO₂eq/Mscf was applied. An average natural gas use of 280 ± 70 Mscf/day (the average of 210 to 350 Mscf/day used at the Bell Creek oil field) was assumed.

Emission Factors for the Downstream Segment

The downstream segment includes 1) crude oil transport from the CO₂ EOR field to the refinery, 2) refining of the crude oil, 3) fuel transport and distribution from the refinery to point of sale, and 4) combustion of the refined petroleum fuel. The baseline NETL petroleum-based transportation fuel model was used to account for the downstream emissions (U.S. Department of Energy National Energy Technology Laboratory, 2008). In developing the emissions factor for refining, the emission factor for each fuel was weighted by the fraction of the total refinery production to derive a product-weighted average refinery emissions per m³ of crude oil, assuming seven different refined fuel products (motor gasoline, diesel, kerosene and kerosene-based jet fuel, residual fuel oil, coke, light ends, and heavy ends). In estimating fuel consumption, a conservative value was adopted by assuming that the carbon contained in crude oil is converted into CO₂ through the combustion of the fuel. The U.S. Environmental Protection Agency (EPA) Greenhouse Gas Equivalencies Calculator (2016) was used. It assumes an average heat content for crude oil of 5.88 MMBtu/bbl, an average carbon coefficient for crude oil of 20.31 kg carbon/MMBtu, and 100% oxidation to derive an emission factor of 430 kg CO₂/bbl. The emission factors for downstream subsegments are 5 (crude oil transport), 45 (refining), 5 (fuel transport), and 430 (fuel combustion) kg CO₂eq/bbl, for a total of 485 kg CO₂eq/bbl incremental oil consumed.

Integrating the Spreadsheet Model Segments

Normalizing All Four Scenarios to Bell Creek

The above sections establish emission factors for segments of two different systems and four different scenarios, each producing natural gas and oil. To scale all four scenarios to the same volumes of natural gas and oil, thereby permitting fair comparisons across scenarios, the natural gas and oil production for all four scenarios was normalized to the forecasted Bell Creek performance over 25 years.

The forecasted Bell Creek cumulative incremental oil recovery factor (RF, %OOIP [original oil in place]) and net CO₂ utilization factor (UF_{net}, Mscf/bbl) come from the EERC's 2015 Bell Creek Test Site Simulation Report (Bosshart and others, 2015). These predictive simulations were conducted to aid in monitoring long-term behavior of injected CO₂ and should not be construed to represent a formal estimation of petroleum reserve estimates for the operators of the field or to prepare annual petroleum reserve certifications for filers with the U.S. Securities and Exchange Commission. The RF and UF_{net} at 25 years into the CO₂ flood are forecasted to be 10.2 %OOIP and 8.7 Mscf/bbl, respectively, resulting in 9.2 MMbbl of incremental oil produced (90 MMbbl OOIP × 10.2%) and a purchased CO₂ requirement of 81,500 MMscf CO₂. In calculating the purchased CO₂ requirement, a 2% fugitive loss rate of purchased CO₂ was assumed (Melzer, 2012), which inflates the purchased CO₂ requirement above the net CO₂ utilization (8.7 Mscf/bbl × 9.2 MMbbl × 1.02). This fugitive loss rate is conservative and represents an assumption based on estimates found in the literature. There is currently no evidence of fugitive CO₂ loss at the Bell Creek oil field. Therefore, across all four scenarios, 9.2 MMbbl of incremental oil was used after which the natural gas segments were scaled to the purchased CO₂ requirement of 81,500 MMscf CO₂, as described below.

Calculating Upstream Emissions from Natural Gas

Upstream emissions are expressed in units of either Mscf of raw natural gas extracted (3.13 kg CO₂eq/Mscf) or Mscf of natural gas product processed (2.28 kg CO₂eq/Mscf). The ratios in Table 2 (NA2) and Table 5 (BC2) allow us to calculate upstream emissions for each scenario based on the purchased CO₂ requirement. For example, in Scenario NA2 the generic natural gas-processing plant captures 1.0 MMscf of CO₂ for every 12.81 MMscf of raw natural gas. Therefore, a purchased CO₂ volume of 81,500 MMscf requires 1,044,000 MMscf of raw natural gas processed. An example calculation is provided below.

$$\begin{aligned} \text{MMscf raw gas} &= \text{MMscf purchased CO}_2 \times \text{MMscf raw natural gas/MMscf CO}_2 \text{ captured} \\ &= 81,500 \text{ MMscf} \times 12.81 \text{ MMscf/MMscf} \\ &= 1,044,000 \text{ MMscf raw natural gas} \end{aligned}$$

For the same purchased CO₂ requirement, the Shute Creek gas plant results in different values, with much less raw natural gas required to generate the purchased CO₂ volumes. For example, in Scenario BC2 the Shute Creek gas plant captures 1.0 MMscf of CO₂ for every 2.12 MMscf of raw natural gas processed. Therefore, a purchased CO₂ volume of 81,500 MMscf

requires 172,800 MMscf of raw natural gas processed, or about one-sixth as much as Scenario NA2.

In Scenarios NA1 and BC1, there is no CO₂ capture and the same volume of raw natural gas and natural gas product to sales are used as were done in Scenarios NA2 and BC2 (i.e., NA1 = NA2 and BC1 = BC2).

Since the downstream emission factor is expressed entirely in units of barrels of oil (485 kg CO₂eq/bbl), the barrels of incremental oil produced drive the entire downstream emissions and no additional calculations are needed.

GREET MODELING

GREET Inputs

The GREET model contains emission information related to North American recovery and processing of conventional and shale natural gas. In addition, the GREET conventional crude oil recovery and processing model contains seven pathways, 13 technologies, and 23 processes that describe emissions related to U.S. crude oil recovery, processing, transportation, and refining into six major U.S. petroleum refinery products (residual oil, petroleum coke, liquefied petroleum gas (LPG), low-sulfur diesel, gasoline blendstock, and conventional jet fuel). Inputs to the GREET simulation consisted of the model's default natural gas composition and the "crude oil average for use in U.S. refineries." Because the GREET model does not contain a single pathway that accepts crude oil input for the production of a refined product output mixture, emission values for each pathway were transferred to a spreadsheet and total emissions were calculated based upon the weighted average of individual product emissions.

Bell Creek crude oil has been characterized as a fairly sweet, light (32° to 41° API) crude oil (Haddenhorst and Gary, 1968; Ballard, 2009). A chemical analysis of two Bell Creek oil samples by the EERC (Gorecki and Pu, 2001) indicated the oil to be fairly paraffinic and provided this study with compositional breakouts by carbon number. Based upon these analyses; assuming typical cut points for straight-run gasoline, jet and diesel fuels, and light and heavy vacuum oil and residuum; and assuming a refinery configuration that included a hydrocracker, catalytic cracker, and coker, this study arrived at a notional refined product slate depicted in Table 6. The notional product distribution is intended to represent (rather than define) the products that could be produced from Bell Creek oil. Admittedly, the distribution does not reflect market conditions that might drive the slate toward more gasoline, it assumes that all feedstock is processed into only six products, and the configuration is an overestimate for a facility configured to process light crudes. However, it is believed that this distribution is superior to adopting a national or regional (e.g., Petroleum Administration for Defense Districts) average that reflects higher coke production, and emission volumes associated with it are less sensitive to reasonable changes in product distribution than such averages.

Table 6. Notional Refined Product Distribution from Bell Creek Crude Oil

Finished Petroleum Products	%
Gasoline	44
Diesel	36
Jet Fuel	9
LPG	5
Residual Fuel Oil	5
Petroleum Coke	1
Total	100

GREET Modeling Challenges for Scenario NA2 and Scenario BC2

Each life cycle scenario was to be composed of three major steps: 1) natural gas recovery and processing; 2) petroleum recovery and processing; and 3) transportation, storage, and refining of petroleum and petroleum products. Each step contains multiple processes and technologies. Based upon EERC application of basic GREET functionality, the GREET model posed a few challenges to its use for performing LCAs for these scenarios:

- The structure of and defaults within the GREET model do not permit linkage of natural gas-processing rates with petroleum recovery and processing rates into a single comprehensive pathway.
- The GREET structure does not provide for production of simultaneous, multiple main products (CO₂, sulfur, and pipeline-quality natural gas) from processing of the raw natural gas. GREET provides for the production of “coproducts,” but these products require allocation or displacement accounting and cannot serve as inputs to other processes.
- The model lacks predefined pathways, processes, and default values that would allow CO₂ captured from raw natural gas to feed directly to an EOR petroleum recovery operation. In fact, the GREET model’s default natural gas composition is only approximately 2% CO₂ in the raw natural gas, which may not be economical to recover.

The result of these challenges was that a default EOR crude oil recovery and processing pathway did not exist within the GREET model; consequently, the Scenario NA2 (North America System 2) and Scenario BC2 (Bell Creek System 2) simulations were constructed outside of GREET.

Final GREET Models

The final GREET models combined default GREET modules, modified GREET modules with site-specific inputs, or spreadsheet models to derive a final life cycle emission for a particular scenario. Table 7 summarizes which model segments were modeled in GREET and which were modeled using spreadsheets.

Table 7. Summary of Segments Modeled in GREET or Spreadsheet

Model Segment	Scenario NA1	Scenario NA2	Scenario BC1	Scenario BC2
Raw Natural Gas Extraction	Not modeled in GREET	Not modeled in GREET	GREET – U.S. natural gas product w/export	GREET – U.S. natural gas product w/export
Natural Gas Processing	Not modeled in GREET	Not modeled in GREET	Spreadsheet model (Shute Creek gas plant)	Spreadsheet model (Shute Creek gas plant)
Gate-to-Gate Oil Recovery	Not modeled in GREET	Not modeled in GREET	GREET – modified ¹	Spreadsheet model (Azzolina and others, 2016)
Downstream Oil Transport, Refining, and Combustion	Not modeled in GREET	Not modeled in GREET	GREET – U.S. conventional ²	GREET – U.S. conventional ¹

¹ Modified to the Bell Creek-specific petroleum chemistry.

² Includes the following GREET modules weighted to the percentages in Table 9: Crude Oil for U.S. Refineries; Crude Oil after Conventional Transportation to U.S. Refineries Production and Transportation; Heavy Butane Gasoline Blendstock; Residual Oil; Petroleum Coke; LPG; Low-Sulfur Diesel; Gasoline Blendstock; and Conventional Jet Fuel.

LCA RESULTS

Spreadsheet Model Results

An emission summary by model segment for each of the four scenarios is presented in Table 8 for the spreadsheet models. These results are shown graphically in Figure 2 (top panel). Appendix A contains more detailed breakdowns of the individual emissions and calculations.

One of the largest differences between Scenarios NA1/NA2 and BC1/BC2 is the volume of raw natural gas extracted, which is 1,043,160 MMscf for NA1/NA2 and 172,511 MMscf for BC1/BC2. As noted above, this is largely attributable to the different raw natural gas compositions, which result in Scenarios NA1/NA2 requiring about six times more raw natural gas to generate 1.0 MMscf of captured CO₂. This results in approximately six times greater emissions for natural gas extraction and transport in Scenarios NA1/NA2 than Scenarios BC1/BC2 (3.27 vs. 0.54 Mt).

Table 8. Spreadsheet Modeling Results by Model Segment for Each of the Four Scenarios, Mt CO₂eq

Model Segment	NA1	NA2	BC1	BC2
Bell Creek EOR Field Data (used to scale all models)				
Incremental Oil Recovered, MMbbl	9.2	9.2	9.2	9.2
CO ₂ Demand, MMscf	–	81,463	–	81,463
Raw Natural Gas Extracted, MMscf	1,043,160	1,043,160	172,511	172,511
Emission Summary by Segment, Mt CO ₂ eq				
Natural Gas Extraction and Transport	3.27	3.27	0.54	0.54
Natural Gas Processing	2.38	0.83	6.28	1.99
CO ₂ Transport	–	0.13	–	0.13
Gate-to-Gate Oil Extraction Downstream	0.51 4.45	0.86 4.45	0.51 4.45	1.56 4.45
Life Cycle Emissions, Mt CO ₂ eq	10.62	9.54	11.78	8.67

Another significant difference is the emissions with and without CO₂ capture at the natural gas-processing facility. Scenarios NA2 and BC2 both emit less CO₂ than their noncapture counterparts in Scenarios NA1 and BC1, respectively, because CO₂ that would otherwise be vented to the atmosphere is being captured and transported to the EOR field.

Finally, the gate-to-gate emissions are greater for the CO₂ EOR Scenarios NA2 and BC2 than their conventional oil extraction counterparts in Scenarios NA1 and BC1, respectively, on account of the higher energy intensity associated with the separation, compression, and reinjection of CO₂ involved in CO₂ EOR.

In aggregate, the scenarios with CO₂ capture and CO₂ EOR produce both products, natural gas and oil, with less emissions. For example, the life cycle emission for Scenario NA1 is 10.62 Mt CO₂eq and for Scenario NA2 is 9.54 Mt CO₂eq, or approximately 10% lower. Similarly, the life cycle emission for Scenario BC1 is 11.78 Mt CO₂eq and for Scenario BC2 is 8.67 Mt CO₂eq, or approximately 26% lower.

GREET Model Results

An emission summary by model segment for each of the four scenarios is presented in Table 9 for the GREET models. These results are shown graphically in Figure 2 (bottom panel).

Analogous to the spreadsheet modeling results, the scenarios with CO₂ capture and CO₂ EOR produce both products, natural gas and oil, with less emissions. For example, the life cycle emissions for Scenario BC1 are 13.86 Mt CO₂eq and for Scenario BC2 are 10.22 Mt CO₂eq, or approximately 26% lower. The life cycle emissions for Scenarios BC1 and BC2 modeled using GREET differ from the spreadsheet model results by approximately 15% (11.78 vs. 13.86 Mt CO₂eq for NA2 and 8.67 vs. 10.22 Mt CO₂eq for BC2).

Table 9. GREET Model Emission Summary by Model Segment for Each of the Four Scenarios, Mt CO₂eq

Model Segment	NA1	NA2	BC1	BC2
Bell Creek EOR Field Data (used to scale all models)				
Incremental Oil Recovered, MMbbl	–	–	9.2	9.2
CO ₂ Demand, MMscf	–	–	–	81,463
Raw Natural Gas Extracted, MMscf	–	–	172,511	172,511
Emission Summary by Segment				
Natural Gas Extraction and Transport	–	–	0.72	0.72
Natural Gas Processing	–	–	8.30	3.36
CO ₂ Transport	–	–	–	0.13
Gate-to-Gate Oil Extraction	–	–	0.49	1.65
Downstream	–	–	4.35	4.35
Life Cycle Emissions	–	–	13.86	10.22

The GREET modeling could not be extended to Scenarios NA1 or NA2 because the GREET gas-processing module was built primarily for cases in which CO₂ is captured from the Shute Creek gas plant. The quantity of CO₂ contained in the raw natural gas that is processed at Shute Creek is sufficiently high such that little raw natural gas is required to be processed for that situation relative to typical North American raw natural gas that contains considerably less CO₂. Because the two models could not be put on the same basis, GREET was not used to model the natural gas portion of Scenarios NA1 or NA2.

Even though there is uncertainty in the CO₂ emission estimates when scenarios within one modeling approach (i.e., all-spreadsheet or all-GREET) are compared, the internally consistent approaches yield the same result: there is a net reduction in life cycle emissions when processing natural gas and producing incremental oil via EOR with CO₂ capture.



While considerable effort was put into acquiring necessary detail for accurate models, much of the data used were obtained from secondary sources. Significantly greater detail and more rigorous treatment would be required to produce an LCA that could be used as proof of CO₂ emission reduction.

SENSITIVITY ANALYSIS

The sensitivity analysis explores the change in the life cycle emission estimates as a function of changing different input parameters in the model. The sensitivity analysis employed here focuses on three key inputs: 1) the net CO₂ utilization of the Bell Creek oil field, which directly impacts the purchased CO₂ requirement; 2) the emission factor for raw natural gas extraction; and 3) the ratio of raw natural gas required per CO₂ captured. The sensitivity analysis modifies these inputs by $\pm 10\%$ and $\pm 20\%$ and then records the life cycle emission factor result from the

Spreadsheet Model Results

EERC MJ52571.CDR

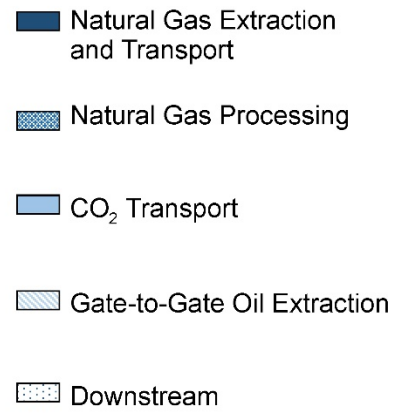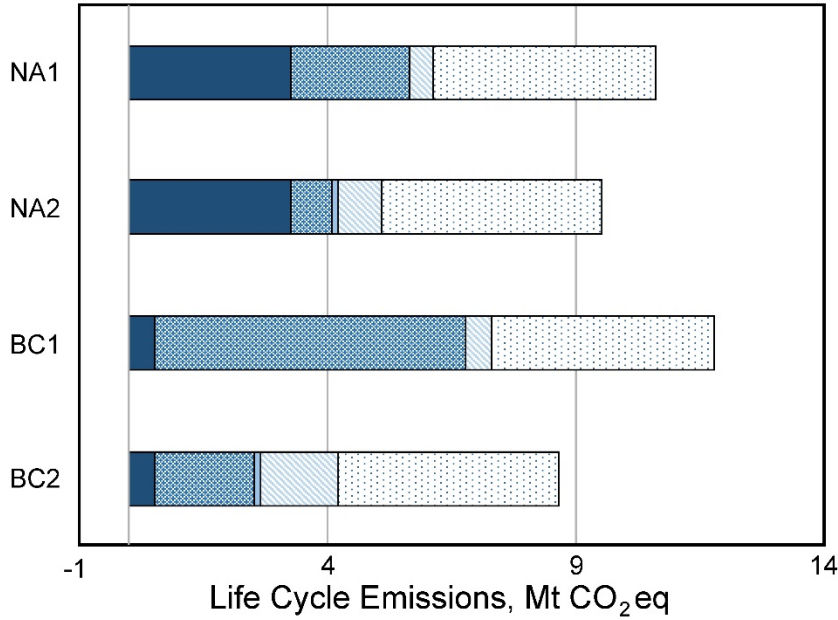

GREET Model Results

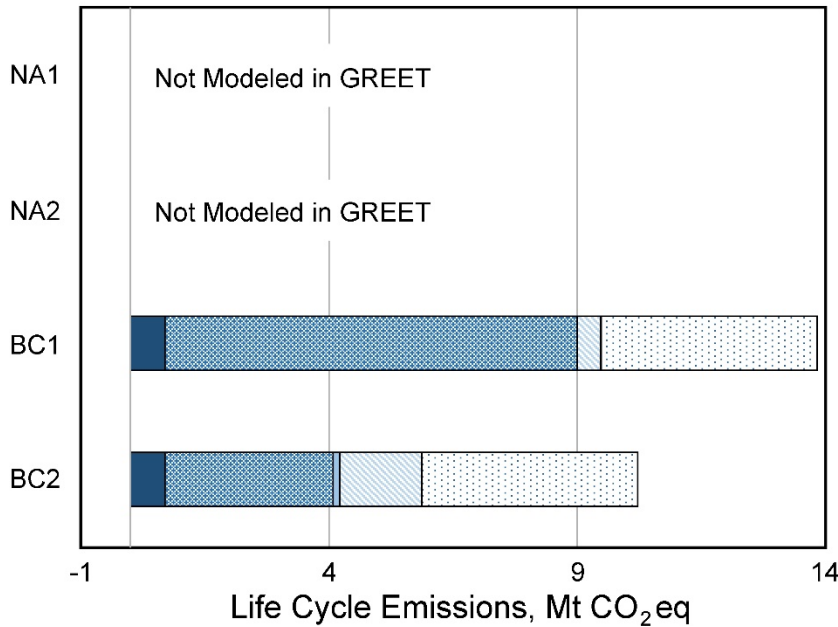


Figure 2. Stacked bar chart showing the life cycle emissions (Mt CO₂eq) associated with each model segment for the four different scenarios that were modeled using spreadsheet models (top panel) or GREET (bottom panel).

spreadsheet model for Scenario BC2 (Bell Creek with CO₂ capture). Sensitivity analysis was not done using the GREET models because of the labor-intensive process of rerunning the GREET simulations, which underscores the value of developing spreadsheet-based models. The net CO₂ utilization was varied from 6.96 to 10.44 Mscf/bbl, the raw natural gas extraction emission factor was varied from 2.5 to 3.8 kg CO₂eq/Mscf, and the ratio of raw natural gas extracted per CO₂ captured and transported was varied from 1.69 to 2.54 MMscf/MMscf (unitless).

The sensitivity analysis results are summarized in Table 10. The top table reports the life cycle emissions in Mt CO₂eq, and the bottom table reports the percentage change from the base case. The largest percentage change was associated with changing the net CO₂ utilization, which resulted in a 6% change in life cycle emissions for a 20% change in net CO₂ utilization. Changing the raw natural gas extraction emission factor and the ratio of raw natural gas extracted per CO₂ captured and transported did not result in a significant change to the overall life cycle emissions, with only a 1% change in life cycle emissions for a 20% change in these inputs. These results also provide a confidence in the significant difference of >3Mt CO₂eq from the Scenario BC1 model (without capture).

Table 10. Sensitivity Analysis Summary for Scenario BC2 (Bell Creek with CO₂ capture)

Parameter	Life Cycle Emissions (Mt CO ₂ eq) for the Stated Case				
	-20%	-10%	0% (Base Case)	+10%	+20%
Modifying Net CO ₂ Utilization	8.14	8.41	8.67	8.94	9.21
Modifying Raw Natural Gas Extraction Emission Factor	8.57	8.62	8.67	8.73	8.78
Modifying Ratio of Natural Gas Processed per CO ₂ Captured	8.57	8.62	8.67	8.73	8.78

Parameter	% Change in Life Cycle Emissions for the Stated Case				
	-20%	-10%	0% (Base Case)	+10%	+20%
Modifying Net CO ₂ Utilization	94	97	100	103	106
Modifying Raw Natural Gas Extraction Emission Factor	99	99	100	101	101
Modifying Ratio of Natural Gas Processed per CO ₂ Captured	99	99	100	101	101

CONCLUSIONS

The modeling results show that the scenarios with CO₂ capture and CO₂ EOR produce both natural gas and oil with lower life cycle emissions than conventional systems producing natural gas and oil independently. These results are supported using two different modeling approaches and sets of modeling inputs (spreadsheet models and GREET).

Sensitivity analysis of the spreadsheet models shows that the model results are sensitive to the net CO₂ utilization, which directly impacts the purchased CO₂ requirement and, therefore, dictates the upstream emissions associated with raw natural gas extraction and processing.

While considerable effort was put into acquiring necessary detail for accurate models, much of the data used were obtained from secondary sources. Significantly greater detail and more

rigorous treatment would be required to produce an LCA for use as proof of CO₂ emission reduction.

REFERENCES

American Petroleum Institute, 2009, Compendium of greenhouse gas emissions for the oil and natural gas industry: www.api.org/ehs/climate/new/upload/2009_GHG_COMPENDIUM.pdf (accessed May 18, 2010).

Azzolina, N.A., Nakles, D.V., Gorecki, C.D., Peck, W.D., Ayash, S.C., Melzer, L.S., and Chatterjee, S., 2015, CO₂ storage associated with CO₂ enhanced oil recovery—a statistical analysis of historical operations: *International Journal of Greenhouse Gas Control*, v. 37, p. 384–397.

Azzolina, N.A., Peck, W.D., Hamling, J.A., Gorecki, C.D., Ayash, S.C., Doll, T.E., Nakles, D.V., and Melzer, L.S., 2016, How green is my oil? a detailed look at greenhouse gas accounting for CO₂-enhanced oil recovery (CO₂-EOR) sites: *International Journal of Greenhouse Gas Control*, v. 51, p. 369–379.

Ballard, D., 2009, Perspectives on Montana's petroleum Industry presented to the MREA-MPA-MONTAX Bridges to the Future Conference: [www.google.com/url?sa=t&rct=j&q=&esrc=s&source=web&cd=2&cad=rja&uact=8&ved=0ahUKEwizw6aGn9jPAhWJVz4KHQrJB0kQFggkMAE&url=http%3A%2F%2Fwww.montanapetroleum.org%2Fassets%2FPDF%2FarticlesReports%2FPerspectives10-Field ExamplesandTechnology_BellCreek.ppt&usg=AFQjCNFY1XAgWec_XH6cJSMxOGIkYw61bQ](http://www.google.com/url?sa=t&rct=j&q=&esrc=s&source=web&cd=2&cad=rja&uact=8&ved=0ahUKEwizw6aGn9jPAhWJVz4KHQrJB0kQFggkMAE&url=http%3A%2F%2Fwww.montanapetroleum.org%2Fassets%2FPDF%2FarticlesReports%2FPerspectives10-Field%20ExamplesandTechnology_BellCreek.ppt&usg=AFQjCNFY1XAgWec_XH6cJSMxOGIkYw61bQ) (accessed October 15, 2009).

Bosshart, N.W., Jin, L., Dotzenrod, N.W., Burnison, S.A., Ge, J., He, J., Burton-Kelly, M.E., Ayash, S.C., Gorecki, C.D., Hamling, J.A., Steadman, E.N., and Harju, J.A., 2015, Bell Creek test site – simulation report: Plains CO₂ Reduction (PCOR) Partnership Phase III draft Task 9 Deliverable D66 (update 4) executive summary for U.S. Department of Energy National Technology Laboratory Cooperative Agreement No. DE-FC-26-05NT42592, Grand Forks, North Dakota, Energy & Environmental Research Center, August.

Cooney, G., Littlefield, J., Marriott, J., and Skone, T.J., 2015, Evaluating the climate benefits of CO₂-enhanced oil recovery using life cycle analysis: *Environmental Science and Technology*, v. 49, no. 12, p. 7491–7500.

Energy & Environmental Research Center, 2015, Bell Creek test site simulation report, Plains CO₂ Reduction (PCOR) Partnership Phase III Task 9 – Deliverable D66, Update 4, August 2015.

Forster, P., Ramaswamy, V., Artaxo, P., Berntsen, T., Betts, R., Fahey, D.W., Haywood, J., Lean, J., Lowe, D.C., Myhre, G., Nganga, J., Prinn, R., Raga, G., Schulz, M., and Van Dorland, R., 2007, Changes in atmospheric constituents and in radiative forcing, In: *Climate change 2007—the physical science basis, contribution of Working Group I to the fourth assessment report of the Intergovernmental Panel on Climate Change* (Solomon, S., Qin, D., Manning, M., Chen, Z.,

- Marquis, M., Averyt, K.B., Tignor, M., and Miller, H.L. [eds.]: Cambridge, United Kingdom and New York, NY, USA, Cambridge University Press, www.ipcc.ch/pdf/assessment-report/ar4/wg1/ar4-wg1-chapter2.pdf (accessed September 27, 2016).
- Gorecki, C.D., and Pu, H., 2001, Evaluation of minimum miscibility pressure (MMP) for Bell Creek Field: Prepared for the Plains CO₂ Reduction Partnership Program for Denbury Resources Incorporated, Bell Creek Project, February 16, 2001.
- Haddenhorst, F.A., and Gary, S., 1968, Development history of Bell Creek Field, Powder River County, Montana: Presented at the Society of Petroleum Engineers Rocky Mountain Regional Meeting, Billings, Montana, June 5–7.
- Intergovernmental Panel on Climate Change, 2000, Good practice guidance and uncertainty management in national greenhouse gas inventories: Montreal.
- Intergovernmental Panel on Climate Change, 2013, Summary for policymakers, In: Stocker, T.F., Qin, D., Plattner, G.-K., Tignor, M., Allen, S.K., Boschung, J., Nauels, A., Xia, Y., Bex, V., Midgley, P.M. (Eds.), *Climate change 2013—the physical science basis: Contribution of Working Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change*, United Kingdom and New York, NY, USA, Cambridge University Press.
- International Organization for Standardization, 2006, Environmental management – life cycle assessment – principles and framework: ISO 14040.
- International Organization for Standardization, 2006, Environmental management – life cycle assessment – requirements and guidelines, International Organization for Standardization: ISO 14044.
- Mangmeechai, A., 2009, Life cycle greenhouse gas emissions, consumptive water use and levelized costs of unconventional oil in North America: Dissertation, Carnegie Mellon University, Pittsburgh, Pennsylvania.
- McCann, T., and Magee, P., 1999, Crude oil greenhouse gas life cycle analysis helps assign values for CO₂ emissions trading: *Oil & Gas Journal*, v. 97, no. 8, p. 38–43.
- Melzer, L.S., 2012, Carbon dioxide enhanced oil recovery (CO₂ EOR): factors involved in adding carbon capture, utilization and storage (CCUS) to enhanced oil recovery: Midland Texas: Melzer Consulting. National Enhanced Oil Recovery Initiative Resource: http://neori.org/Melzer_CO2EOR_CCUS_Feb2012.pdf (accessed September 30, 2016).
- Parker, M.E., Northrop, S., Valencia, J.A., Foglesong, R.E., and Duncan, W.T., 2011, CO₂ management at ExxonMobil’s LaBarge Field, Wyoming, USA: *Energy Procedia*, v. 4, p. 5455–5470.
- U.S. Department of Energy National Energy Technology Laboratory, 2010a, NETL life cycle inventory data – unit process—extraction of NG from a conventional onshore gas well: Updated

- June 2010 (version 01, www.netl.doe.gov/research/energy-analysis/Life Cycle-analysis/unit-process-library (accessed October 2016)).
- U.S. Department of Energy National Energy Technology Laboratory, 2010b, NETL life cycle inventory data – unit process—natural gas sweetening: Updated April 2011 (version 02), www.netl.doe.gov/research/energy-analysis/Life Cycle-analysis/unit-process-library (accessed October 2016).
- U.S. Department of Energy National Energy Technology Laboratory, 2010c, An assessment of gate-to-gate environmental life cycle performance of water-alternating-gas CO₂-enhanced oil recovery in the Permian Basin: DOE/NETL-2010/1433, September 30.
- U.S. Department of Energy National Energy Technology Laboratory, 2013a, Gate-to-gate life cycle inventory and model of CO₂-enhanced oil recovery: DOE/NETL-2013/1599, September 30, 2013.
- U.S. Department of Energy National Energy Technology Laboratory, 2014, Life cycle analysis of natural gas extraction and power generation: DOE/NETL-2014/1646, May 29, 2014.
- U.S. Department of Energy National Energy Technology Laboratory, 2008, Development of Baseline Data and Analysis of Life Cycle Greenhouse Gas Emissions of Petroleum-Based Fuels: DOE/NETL-2009/1346, November 26, 2008.
- U.S. Energy Information Administration, 2009a, U.S. nonhydrocarbon gases removed from natural gas: www.eia.gov/dnav/ng/hist/n9030us2a.htm (accessed October 2016).
- U.S. Energy Information Administration, 2009b, U.S. natural gas gross withdrawals, www.eia.gov/dnav/ng/hist/n9010us2a.htm (accessed October 2016).
- U.S. Environmental Protection Agency, 2016, Greenhouse gas equivalencies calculator: www2.epa.gov/energy/ghg-equivalencies-calculator-calculations-and-references (accessed October 2016).
- U.S. Environmental Protection Agency, 2012, Emissions & generation resource integrated database (eGRID): www.epa.gov/energy/egrid (accessed October 2016).
- Wyoming Oil and Gas Conservation Commission, 2016, Gas Plant Form 9: wogcc.state.wy.us/PurGasPlant.cfm?nCODE=2765 (accessed October 12, 2016).
- Wyoming Tax Appeals, Findings of Fact, Conclusions of Law, and order, 2006, taxappeals.state.wy.us/images/docket_no_200669etal.htm (accessed October 12, 2016).

APPENDIX A

DETAILED LIFE CYCLE INVENTORY RESULTS

Scenario NA1: North American Natural Gas Processing and U.S. Primary and Secondary Petroleum Recovery and Processing (North America System 1)

Model Component	Value	Unit
Bell Creek EOR Field Data (used to scale all models)		
Operational Lifetime	25	Years
Net Carbon Dioxide (CO ₂) Utilization	8.7	Mscf/bbl
Incremental Oil Recovery Factor	10.2%	% OOIP
Original Oil in Place (OOIP)	90	MMbbl
OOIP	90,000,000	bbl
Incremental Oil Recovered	9.2	MMbbl
Incremental Oil Recovered	9,180,000	bbl
Fugitive CO ₂ Leakage Rate (surface losses)	2.0%	%
Bell Creek CO ₂ Demand	81,463,320	Mscf
Bell Creek CO ₂ Demand	81,463	MMscf
Natural Gas Extraction and Transport		
Ratio: Raw Natural Gas/CO ₂ Captured and Transported		MMscf/MMscf
Raw Natural Gas Required	1,043,160	MMscf
Raw Natural Gas Extraction and Transport Emission Factor	3130	kg CO ₂ eq/MMscf
Emissions from Raw Natural Gas Extraction and Transport	3,265,554,755	kg CO ₂ eq
Emissions from Raw Natural Gas Extraction and Transport	356	kg CO ₂ eq/bbl
Natural Gas Processing		
Natural Gas-Processing Emission Factor (with capture)	2284	kg CO ₂ eq/MMscf
Emissions from Natural Gas Processing	2,383,082,466	kg CO ₂ eq
Emissions from Natural Gas Processing	260	kg CO ₂ eq/bbl
CO ₂ Transport		
MMscf CO ₂ Emitted from Electric Generation for Transport/MMscf Captured CO ₂	0.00000	MMscf/MMscf
Emissions from CO ₂ Transport	0	MMscf
Emissions from CO ₂ Transport	0	kg CO ₂ eq
Emissions from CO ₂ Transport	0	kg CO ₂ eq/bbl
Conventional Oil Gate to Gate		
Conventional Oil Emission Factor	56	kg CO ₂ eq/bbl
Emissions from Electricity Use, lifetime	514,080,000	kg CO ₂ eq
Downstream Crude Oil Pipeline, Refining, Transport to Point of Sale, and Combustion		
Emissions from Downstream	485	kg CO ₂ eq/bbl
Emissions from Downstream	4,452,300,000	kg CO ₂ eq
Life Cycle Emissions without Displacement	10,615,017,221	kg CO ₂ eq
Life Cycle Emissions without Displacement	1156	kg CO ₂ eq/bbl

Scenario-NA2: North American Natural Gas Processing with CO₂ Capture and U.S. EOR and Processing Using the Captured CO₂ (North America System 2)

Model Component	Value	Unit
Bell Creek EOR Field Data (used to scale all models)		
Operational Lifetime	25	Years
Net CO ₂ Utilization	8.7	Mscf/bbl
Incremental Oil Recovery Factor	10.2%	% OOIP
OOIP	90	MMbbl
OOIP	90,000,000	bbl
Incremental Oil Recovered	9.2	MMbbl
Incremental Oil Recovered	9,180,000	bbl
Fugitive CO ₂ Leakage Rate (surface losses)	2.0%	%
Bell Creek CO ₂ Demand	81,463,320	Mscf
Bell Creek CO ₂ Demand	81,463	MMscf
Natural Gas Extraction and Transport		
Ratio: Raw Natural Gas/CO ₂ Captured and Transported	12.81	MMscf/MMscf
Raw Natural Gas Required	1,043,160	MMscf
Raw Natural Gas Extraction and Transport Emission Factor	3130	kg CO ₂ eq/MMscf
Emissions from Raw Natural Gas Extraction and Transport	3,265,554,755	kg CO ₂ eq
Emission Factor from Raw Natural Gas Extraction and Transport	356	kg CO ₂ eq/bbl
Natural Gas Processing		
Natural Gas-Processing Emission Factor (with capture)	798	kg CO ₂ eq/MMscf
Emissions from Natural Gas Processing	832,677,995	kg CO ₂ eq
Emissions from Natural Gas Processing	91	kg CO ₂ eq/bbl
CO ₂ Transport		
MMscf CO ₂ Emitted from Electric Generation for Transport/MMscf Captured CO ₂	0.08427	MMscf/MMscf
Emissions from CO ₂ Transport	6865	MMscf
Emissions from CO ₂ Transport	130,777,949	kg CO ₂ eq
Emissions from CO ₂ Transport	14	kg CO ₂ eq/bbl
Generic (Permian Basin) Gate to Gate		
Gate-to-gate Emissions, lifetime	855,131,754	kg CO ₂ eq
Gate-to-gate Emission factor, lifetime	93.2	kg CO ₂ eq/bbl
Downstream Crude Oil Pipeline, Refining, Transport to Point of Sale, and Combustion		
Emissions from Downstream	485	kg CO ₂ eq/bbl
Emissions from Downstream	4,452,300,000	kg CO ₂ eq
Life Cycle Emissions without Displacement	9,536,442,453	kg CO ₂ eq
Life Cycle Emissions without Displacement	1039	kg CO ₂ eq/bbl

Scenario-BC1: Shute Creek Natural Gas Processing and Bell Creek Conventional Oil Production (Bell Creek System 1)

Model Component	Value	Unit
Bell Creek EOR Field Data (used to scale all models)		
Operational Lifetime	25	Years
Net CO ₂ Utilization	8.7	Mscf/bbl
Incremental Oil Recovery Factor	10.2%	% OOIP
OOIP	90	MMbbl
OOIP	90,000,000	bbl
Incremental Oil Recovered	9.2	MMbbl
Incremental Oil Recovered	9,180,000	bbl
Fugitive CO ₂ Leakage Rate (surface losses)	2.0%	%
Bell Creek CO ₂ Demand	81,463,320	Mscf
Bell Creek CO ₂ Demand	81,463	MMscf
Natural Gas Extraction and Transport		
Ratio: Raw Natural Gas Extracted/CO ₂ Captured and Transported		MMscf/MMscf
Raw Natural Gas Extracted	172,511	MMscf
Raw Natural Gas Extraction and Transport Emission Factor	3130	kg CO ₂ eq/MMscf
Emissions from Raw Natural Gas Extraction and Transport	540,034,912	kg CO ₂ eq
Emissions from Raw Natural Gas Extraction and Transport	59	kg CO ₂ eq/bbl
Shute Creek Natural Gas Processing (without capture)		
CO ₂ Emitted/Raw Natural Gas Extracted	0.69	MMscf/MMscf
CH ₄ (methane) Emitted/Raw Natural Gas Extracted	0.00	MMscf/MMscf
CO ₂ Emitted	119,188	MMscf
CH ₄ Emitted	15	MMscf
CO ₂ Density	52,591	kg CO ₂ /MMscf CO ₂
CH ₄ Density	19,124	kg CH ₄ /MMscf CH ₄
Emissions from Natural Gas Processing	6,278,050,336	kg CO ₂ eq
Emission Factor from Natural Gas Processing	36,392	kg CO ₂ eq/MMscf
Emission Factor from Natural Gas Processing	684	kg CO ₂ eq/bbl
CO ₂ Transport		
MMscf CO ₂ Emitted from Electric Generation for Transport/MMscf Captured CO ₂	0.00000	MMscf/MMscf
Emissions from CO ₂ Transport	0	MMscf
Emissions from CO ₂ Transport	0	kg CO ₂ eq
Emissions from CO ₂ Transport	0	kg CO ₂ eq/bbl
Bell Creek Gate to Gate (conventional)		
Conventional Oil Emission Factor	56	kg CO ₂ eq/bbl
Emissions from Electricity Use, lifetime	514,080,000	kg CO ₂ eq
Downstream Crude Oil Pipeline, Refining, Transport to Point of Sale, and Combustion		
Emissions from Downstream	485	kg CO ₂ eq/bbl
Emissions from Downstream	4,452,300,000	kg CO ₂ eq
Life Cycle Emissions without Displacement		
Life Cycle Emissions without Displacement	11,784,465,249	kg CO ₂ eq
Life Cycle Emission Factor without Displacement	1284	kg CO ₂ eq/bbl

Scenario-BC2: Shute Creek natural gas processing with CO₂ capture and Bell Creek incremental oil production via EOR and the captured CO₂ (Bell Creek System 2)

Model Component	Value	Units
Bell Creek EOR Field Data (used to scale all models)		
Operational Lifetime	25	Years
Net CO ₂ Utilization	8.7	Mscf/bbl
Incremental Oil Recovery Factor	10.2%	%OOIP
OOIP	90	MMbbl
OOIP	90,000,000	bbl
Incremental Oil Recovered	9.2	MMbbl
Incremental Oil Recovered	9,180,000	bbl
Fugitive CO ₂ Leakage Rate (surface losses)	2.0%	%
Bell Creek CO ₂ Demand	81,463,320	Mscf
Bell Creek CO ₂ Demand	81,463	MMscf
Natural Gas Extraction and Transport		
Ratio: Raw Natural Gas Extracted/CO ₂ Captured and Transported	2.12	MMscf/MMscf
Raw Natural Gas Extracted	172,511	MMscf
Raw Natural Gas Extraction and Transport Emission Factor	3130	kg CO ₂ eq/MMscf
Emissions from Raw Natural Gas Extraction and Transport	540,034,912	kg CO ₂ eq
Emission Factor from Raw Natural Gas Extraction and Transport	59	kg CO ₂ eq/bbl
Shute Creek Natural Gas Processing (with capture)		
CO ₂ Emitted/CO ₂ Captured and Transported	0.46	MMscf/MMscf
CH ₄ Emitted/CO ₂ Captured and Transported	0.00	MMscf/MMscf
CO ₂ Emitted	37,725	MMscf
CH ₄ Emitted	15	MMscf
CO ₂ Density	52,591	kg CO ₂ /MMscf CO ₂
CH ₄ Density	19,124	kg CH ₄ /MMscf CH ₄
Emissions from Natural Gas Processing	1,993,810,510	kg CO ₂ eq
Emission Factor from Natural Gas Processing	11,558	kg CO ₂ eq/MMscf
Emission Factor from Natural Gas Processing	217	kg CO ₂ eq/bbl
CO₂ Transport		
MMscf CO ₂ Emitted from Electric Generation for Transport/MMscf Captured CO ₂	0.08427	MMscf/MMscf
Emissions from CO ₂ Transport	6865	MMscf
Emissions from CO ₂ Transport	130,777,949	kg CO ₂ eq
Emission Factor from CO ₂ Transport	14	kg CO ₂ eq/bbl
Bell Creek Gate to Gate		
Electricity Use (average over life cycle)	270	MWh/day
Electricity Use Emissions Factor	619	kg CO ₂ eq/MWh
Emissions from Electricity Use, lifetime	1,528,312,495	kg CO ₂ eq
Emission Factor from Electricity Use, lifetime	166	kg CO ₂ eq/bbl
Natural Gas Use	280	Mscf/day
Natural Gas Use Emissions Factor	11.2	kg CO ₂ eq/Mscf
Emission from Natural Gas Use, lifetime	28,698,140	kg CO ₂ eq
Emission Factor from Natural Gas Use, lifetime	3.1	kg CO ₂ eq/bbl
Emissions from Electricity + Natural Gas Use, lifetime	1,557,010,635	kg CO ₂ eq
Emission Factor from electricity + Natural Gas Use, lifetime	170	kg CO ₂ eq/bbl
Downstream Crude Oil Pipeline, Refining, Transport to Point of Sale, and Combustion		
Emission factor from Downstream	485	kg CO ₂ eq/bbl
Emissions from Downstream	4,452,300,000	kg CO ₂ eq
Life Cycle Emissions without Displacement	8,673,934,006	kg CO ₂ eq
Life Cycle Emissions Factor without Displacement	945	kg CO ₂ eq/bbl